

GT FreedomLift™

Unique Self-Standing Lift

Vertical Platform Lift - Commercial or Residential


GT
Silver
1-Year
Warranty*

BEST WARRANTY ON THE MARKET



The Only One Of Its Category :

- ▶ **Self-Supporting**
- ▶ **No Hoistway Column Required**

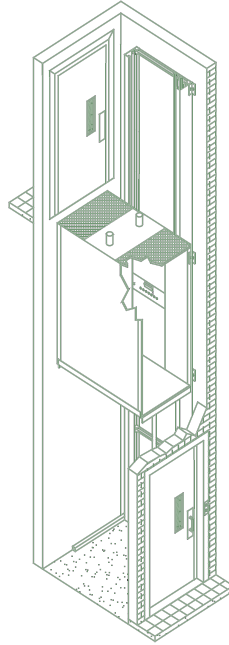

- Up to 1000 lbs Capacity
- All Loads Supported in Pit
- Smooth & Quiet Operation
- Only 6" (150 mm) Pit !
- Easy to Install
- Easy to Use
- Fully Enclosed Cab
- Full Cab Height - 6'-8" (2032 mm)
- Low Maintenance
- **GT-Swing™** Door
- Simple Relay Logic Control - **GT-EZ100™**
- CSA Approved Components
- Visit Our Website at :

With more than 20 years of experience and expertise, our engineers have designed and developed a high quality lift with the most dependable components available on the market.

The latest revolution in commercial wheelchair accessibility lifts. The Global-Tardif Elevator Manufacturing Group inc. introduces the newest self-supported vertical platform lift, the **GT FreedomLift™**.

With its unique concept and design, the new **GT FreedomLift™** provides a safe, reliable and smooth ride. It is offered in a very large variety of designs, colors & finishes.

Very user friendly, reliable and dependable.

Quality... price... delivery... **Global-Tardif is your total resource.**

since 1984

GLOBAL TARDIF



Elevator Manufacturing Group



GT FreedomLift™

GT
Silver
1-Year
Warranty*

Standard Features

- 750 lbs (340 kg) Capacity
- 1:2 Cable Hydraulic Drive System or Direct-Acting
- 25 fpm (0,13 m/sec)
- 2 HP
- Power Supply: 575, 480, 208 volt, 3 PH, 60 HZ or 220, 110 V, 1 PH, 60 HZ
- Slack/Broken Cable Safety Device
- **GT-EZ100™** Control - Simple & Reliable Relay Logic
- 6" (150 mm) Pit Depth Only
- 96" (2438 mm) Minimum Overhead
- Emergency Manual Lowering Valve
- Emergency Battery Lowering Device
- Constant Pressure Operation
- Two Way Levelling
- Emergency Alarm Button
- Automatic Emergency Lighting
- Emergency Stop Button
- Down Speed Flow Control
- Low Pressure Switch Safety Device
- Emergency Pit Switch
- "In Use" Indicator
- Illuminated LED Buttons
- Plywood Flooring
- Negative Pressure Switch
- Dry Motor Power Unit Outside the Tower (Requires a 36" W x 24" D Machine Room)


Options

- 1000 lbs Capacity
- Pre-wired Tower Equipment
- Automatic Swing Doors
- Alternate Four (4) Cab Wall Colors
- Custom Plastic Laminates for Cab Walls
- Custom Stainless or Bronze Finishes
- Custom Size, Custom Design, Architectural Cab Interior
- Retiring Cam
- Electric Strike - PrudHomme
- Digital Position Indicator
- Submersible Pump Unit (with Machine Room)

...and for more

Name It, We Will Do It!

Opening Configurations

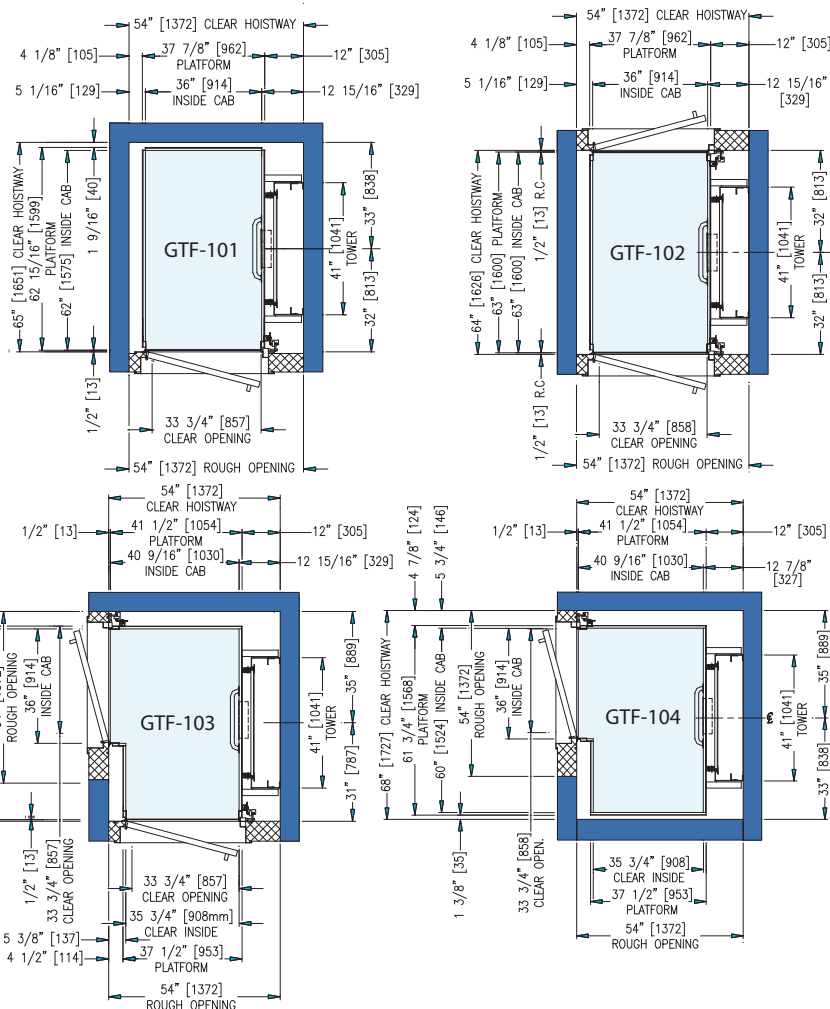

Standard Cab Features

- 6'-8" (2032 mm) Cab Height
- Two (2) Standard Cab Wall Colors
- Stainless Steel Satin Mouldings
- Stainless Steel Satin Car Operating Panel
- Ceiling with Pot Lights and Eggcrate
- Stainless Steel Satin Tubular Handrail

Standard GT-Swing™ Doors Features

- 1 ½ Hr UL / ULC Fire Rated Entrances Assembly
- Swing Clear Non Exposed Stainless Steel Hinges
- Hollow Metal Door Panels
- Zinc Coated
- Anti Skid Sill Plate
- GAL Door Interlock - Type "N"
- Integrated Hall Station Basic Line Buttons
- Hydraulic Delayed Door Closer

Your Authorized Dealer is:

For more information and detailed drawings
visit our web site at
www.globaltardif.com



*The GLOBAL-TARDIF Limited Warranty covers replacement of any defective parts for a period of one (1) years. Labour cost not included.
GLOBAL-TARDIF reserves the rights to discontinue models or options at any time or change the specifications, materials, equipment or pricing without notice and without incurring obligation.
U.S. and foreign patents pending. 2004 GLOBAL-TARDIF Elevator Manufacturing Group Inc.

ver.Oct.07